


A 16", electric, hazardous location, high-single-speed, smoke ejector designed for high power air movement for the toughest of jobs. Perfect for departments with the need to force or pull air deep into a structure or underground with hazardous or unknown gasses. **The most powerful 16" hazardous location smoke ejector in the fire industry.**

HF164E Electric Smoke Ejector

The Super Vac Smoke Ejector provides a versatile ventilation option. This box-shaped fan pulls smoke from a structure using negative pressure but can be flipped around for positive pressure tactics. Smoke ejectors are most effective when working with natural airflow and not against Mother Nature.

Features

- 1 Patented 4-Tip Recurved Aluminum Blade:** Creates a tight spiral of air to eject smoke and fumes away from the building; aluminum holds up better than plastic in high heat
- 2 Precision-Balanced Blade:** Maximizes output
- 3 Heavy-Duty Rubber Feet:** Adds friction to keep fan in place
- 4 Carry Handles:** Makes transportation easy with one or two people
- 5 Front and Rear Guards:** Prevents accidental contact with key components

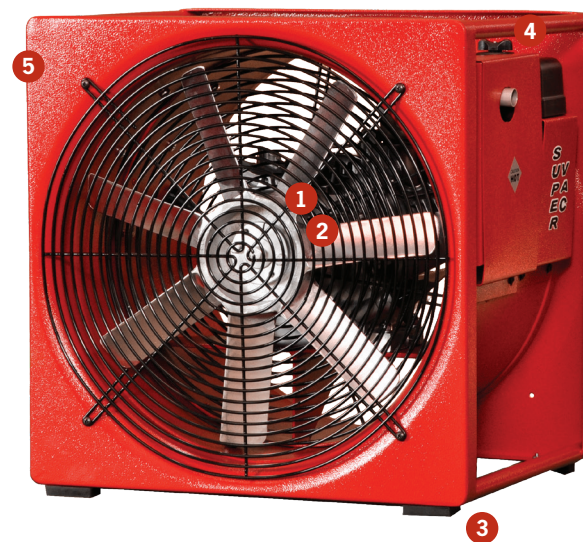

**5-YEAR
WARRANTY**

Compatible with these Super Vac Accessories:

Spiral Duct, Mountain Mister, Tilt Frame, Foam Generator and Door Bar/Hanger

16" Blades - H x W x D: 19.25" x 18.75" x 13" - 489mm x 477mm x 330mm

| Model | Weight | Motor | RPM | Start | Run | Output |
|--------|-------------------|---|-------|---------------------------|---------|--|
| HF164E | 63 lbs 28.5 kg | Bluffton, single speed, hazardous location rated Class 1 Group D, 1-1/2 Hp, 60hz, 115/230V | 3,450 | 6,000 w 20-amp circuit | 2,100 w | Shroud: 4,950 cfm - 8,410 cmh Venturi: 9,620 cfm - 16,345 cmh |



ELECTRIC SMOKE EJECTOR

A Super Vac, part number #HF164E, 16" high speed electric smoke ejector shall be supplied. The unit shall feature a square construction design for strength and stability. The unit shall be designed with four (4) carrying handles on each corner for easy positioning and rapid deployment. All components of the smoke ejector shall 100% manufactured and assembled in the United States.

The smoke ejector shall be powered by a 1-1/2 Horsepower electric motor that is listed by Underwriters Laboratory for Hazardous Locations up to and including Class 1, Group D. The unit shall be operational with any 115 with a 20 amp circuitry or 230 volt system.

The entire housing of the unit shall be constructed of aluminum and shall surround the four-blade 16" recurve tip blade to enhance lifting and user safety. The blade shall be constructed of precision cast aluminum alloy #535. The blade shall be precision balanced and attached to the engine shaft for a direct drive connection.

Any smoke ejectors utilizing belts, pulley, gears, or additional shafts shall not be acceptable.

The unit shall be designed to attach a ventilation air duct to either the inlet or outlet side of the fan. The unit shall be designed to be used in conjunction with either a spiral or "L" air ducting and its Super Vac adapters.

The front and rear safety guards shall be designed to OSHA and U.L. Standards to prevent accidental contact with the blade. The unit shall be tested to AMCA 240 for air movement and the air movement shall exceed 4950 cubic feet per minute.

The smoke ejector shall be designed with the following:

| | |
|------------------------|--------------------------------------|
| Motor Manufacturer: | Bluffton High Speed Electric Motor |
| Horsepower: | 1-1/2HP |
| Voltage: | 115/230V |
| Cubic feet per minute: | 4950 CFM by AMCA240 |
| Dimensions: | 19.25" high x 18.75" wide x 16" deep |
| Weight: | 63 pounds |

The smoke ejector shall have a minimum five (5) year warranty. The engine shall be warranted by the engine manufacturer for a minimum of two (2) years.

