

AF200 I Industrial Blowers/Exhausters


The VF Series provides precise air control thanks to its variable-speed motor. The VF Series moves up to 30% more air flow than single-speed electric fans. Feature full digital control, fan speeds can be adjusted easily and reversed. The VF Series is compatible with GFCI circuits make these units highly versatile.

Features

- 1 **Patented 4-Tip Recurved Aluminum Blade:** Creates a tight spiral of air to eject smoke and fumes away from the building; aluminum holds up better than plastic in high heat.
- 2 **Precision-Balanced Blade:** Maximizes output.
- 3 **Heavy-Duty Rubber Feet:** Friction keeps fan in place.
- 4 **4 Carry Handles:** Makes transportation easy with one or two people.
- 5 **Front and Rear Guards:** Prevents accidental contact with key components.

Compatible with these Super Vac Accessories:

Spiral Duct, Mountain Mister, Tilt Frame and Door Bar/Hanger

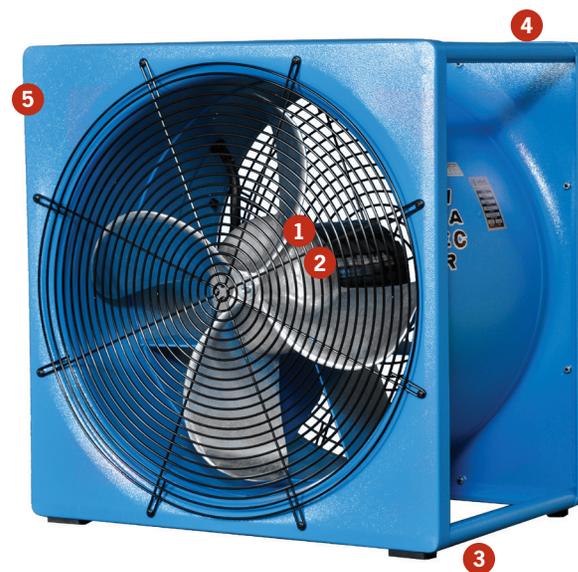

**5-YEAR
WARRANTY**

20" Blades - H x W x D: 25.5" x 24.75" x 16.25" - 648mm x 629mm x 413mm

Model	Weight	Motor	RPM	Run	Output
AF200i	60 lbs 27 kg	Pneumatic, 1/2 HP	3,600	100 PSI - 75 cfm	9,800 cfm - 16,650 cmh

Industrial Blowers / Exhausters

A Super Vac, part number #AF200i, 2 0" water turbine smoke ejector shall be supplied. The unit shall feature square construction for strength and stability. The unit shall be designed with four (4) carrying handles on each corner for easy positioning and rapid deployment. All components of the smoke ejector shall be 100% manufactured and assembled in the United States.

The blade shall be driven by a 1-1/2 Horsepower water turbine motor with 100 PSI. The blade shall be constructed of precision-cast aluminum alloy #713. Any ventilator using blades that cannot withstand the high heat typical on fire scenes shall not be acceptable. Plastic shall not be an acceptable blade material.

The blade shall be driven by the water turbine engine with a direct drive connection. The blade shall be precision balanced and attached to the engine shaft with a split taper-lock bushing. Any ventilators utilizing belts, pulley, gears or additional shafts shall not be acceptable.

The unit shall be designed to attach a ventilation air duct to either the inlet or outlet side of the fan. The unit shall be designed to be used in conjunction with either a spiral or "L" air ducting and its Super Vac adapters.

The front and rear safety guards shall be designed to OSHA and U.L. Standards to prevent accidental contact with the blade. The unit shall be tested to AMCA 210 for air movement and the air movement shall exceed 9,800 cubic feet per minute

The smoke ejector shall be designed with the following:

Motor:	Pneumatic Water Turbine
Horsepower:	1-1/2 HP
Speed:	3,600 rpm
Output:	9,800 cfm
Dimensions:	25.5" high x 24.75" wide x 16.25" deep
Weight:	60 lbs.

The smoke ejector shall have a minimum five (5) year warranty. The motor shall be warranted by the motor manufacturer for a minimum of two (2) years.

