

INSTALLATION

REPLACEMENT

VALOR BATTERY FAN POWER BUTTON



INSTALL MANUAL


This manual covers the replacement and installation of the power button on a Super Vac Valor series battery-powered ventilation fan.

Please consult your power button kit for parts.



For additional instruction, view installation video at bit.ly/ValorSeriesPowerButton

PARTS AND TOOLS

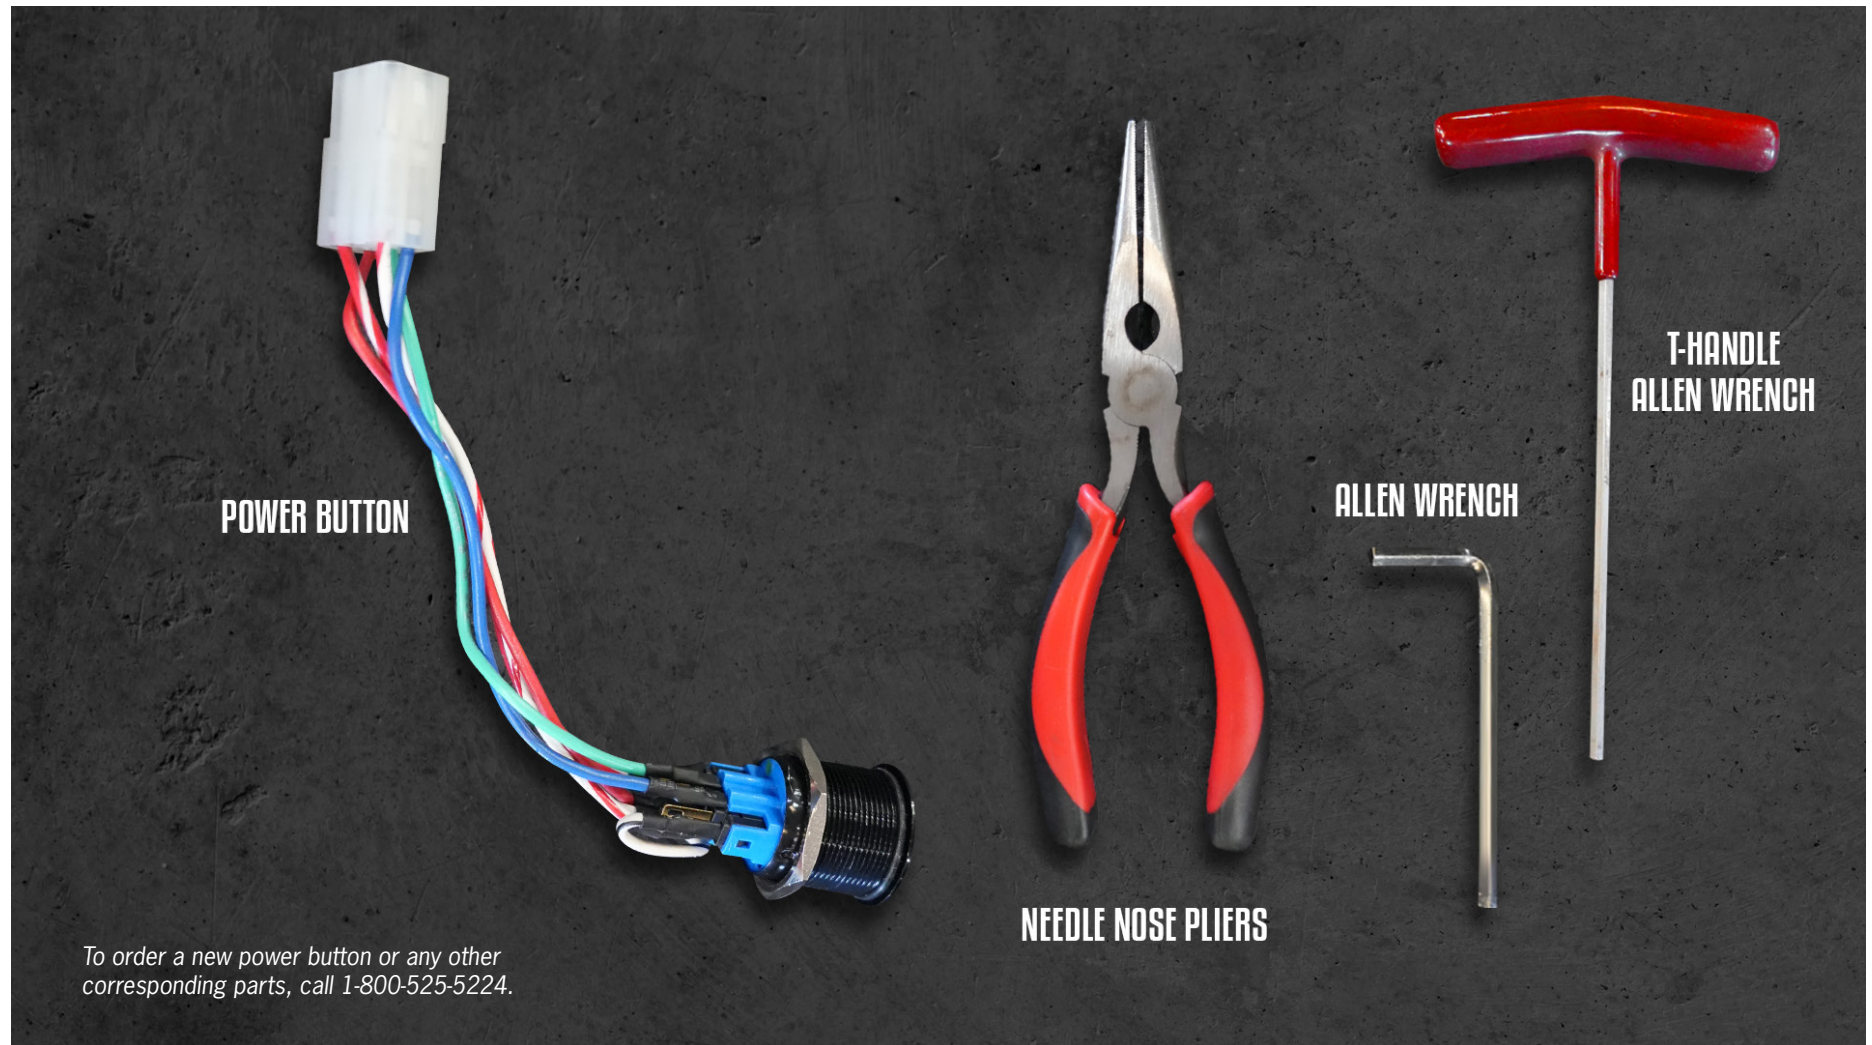

STEP 1:

Layout fan handle side down.



Locate the cover plate under the power panel. Rotate shroud to give yourself space.

STEP 2:




Remove power panel cover plate.




Remove (6) socket head screws using an Allen wrench.

STEP 3:


Disconnect power button wiring harness.

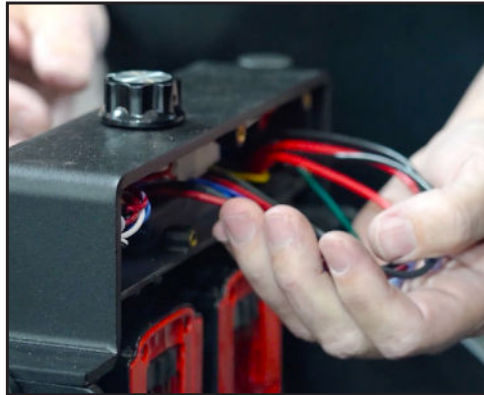

Expose potentiometer and LED harness to access the power button harness.

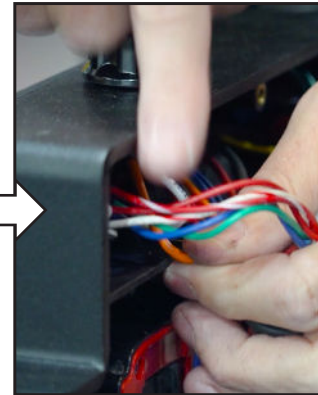


Gently pull out the power button wire harness.

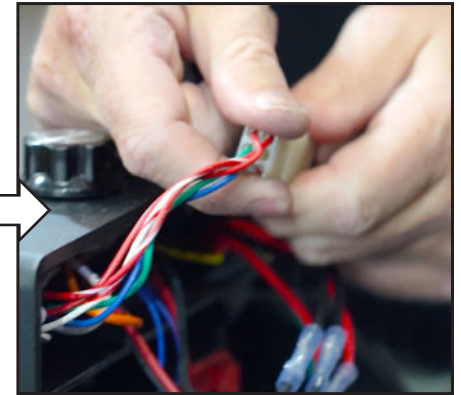


Disconnect wire harness plug.

STEP 4:


Remove power button wire harness.

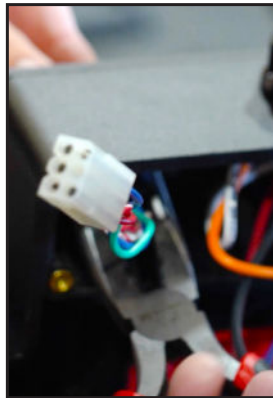


Loosen lock nut with needle nose pliers.

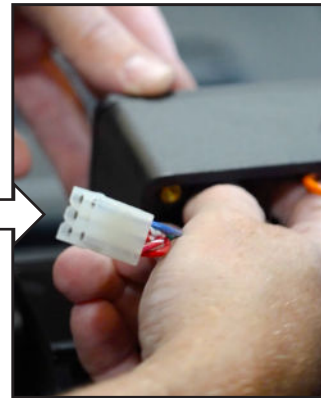

Unscrew lock nut using fingers. (Lots of threads.)

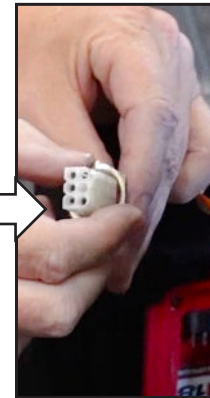


Remove lock nut.

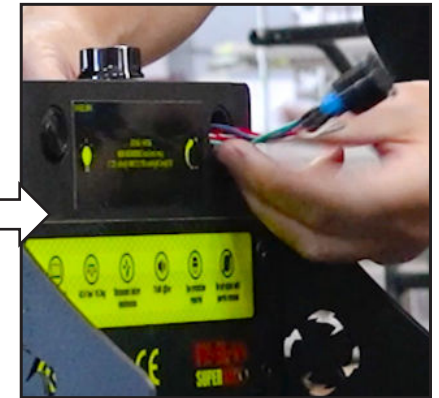


Push power button wire harness through the top opening.

STEP 5:


Insert new power button.

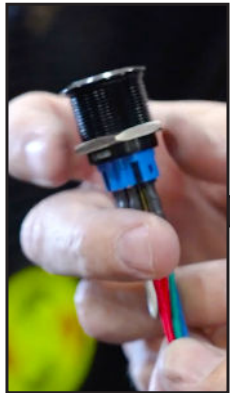


Unscrew locking nut from power button.

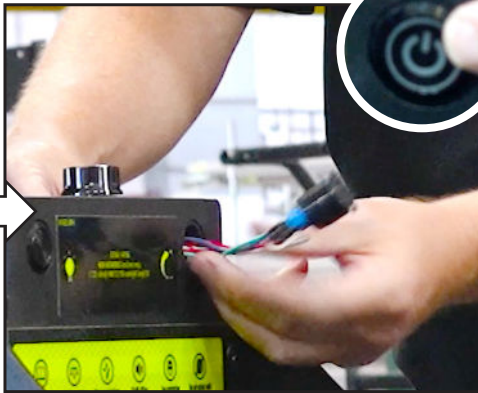


Insert new power button harness plug first back through the top of the power panel, power icon facing up towards fan.

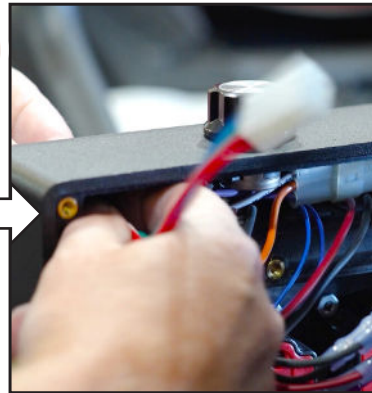

Apply locking nut using fingers.

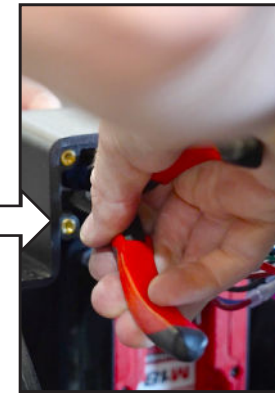

Tighten with needle nose pliers.

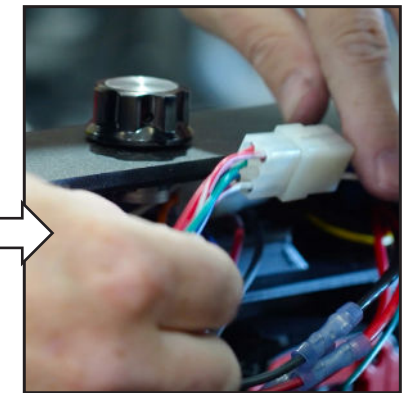

Reconnect wiring harness plug. Match 45° angles to 3 to 2 pin connector.

TEST FAN


Prior to replacing cover plate.




Insert batteries or plug into shore power to test. **Remove batteries/unplug after.**

STEP 6:


Replace power panel cover plate.

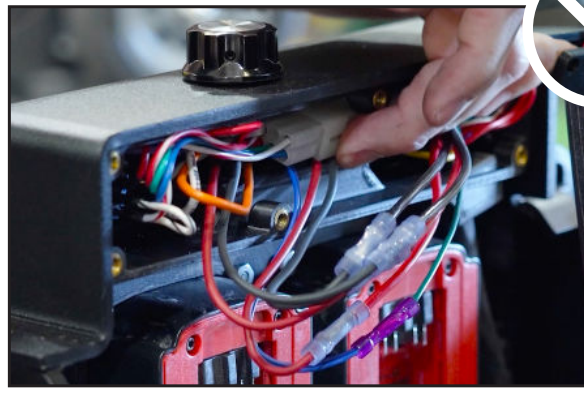

Tuck power button harness in first, then the potentiometer/LED harness. Ensure no wires are wedged between panel and plate.

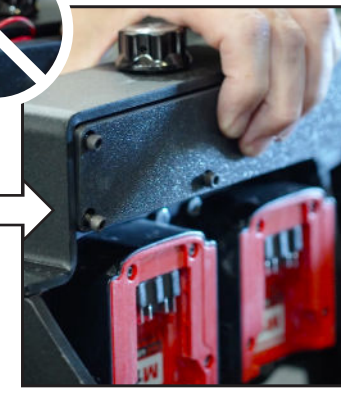

Start (6) socket head screws with fingers, then tighten with Allen wrench. **Over tightening can result in breaking panel or stripped screws.**

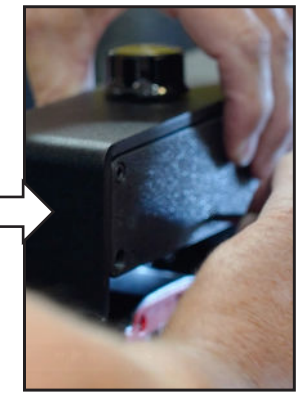



For parts or service information, contact:

Super Vacuum Manufacturing Company, Inc.

3842 Redman Dr.
Fort Collins, CO 80524

Phone: 800-525-5224
970-297-7100

Fax: 970-297-7099

Email : info@supervac.com
Internet: www.supervac.com