

P200SE Smoke Ejectors ↔ Electric Motor

A 20", electric, hazardous location, single-speed, smoke ejector designed for high power air movement for larger jobs, but still run on a 15 amp household circuit. Perfect for departments with larger residential buildings in their jurisdiction and wanting a negative pressure fan for all types of locations. The P200SE is powered by a motor rated for Class 1 Group D environments.

Features

- ↔ Patented 4-tip Recurve Aluminum Blade ↔ holds up better than plastic in high heat
- ↔ Precision Balanced Blade ↔ maximizes output
- ↔ Rubber Feet ↔ heavy duty rubber adds friction to keep fan in place
- ↔ 4 Carry Handles ↔ makes transportation easy with 1 or 2 people
- ↔ Front and Rear Guards ↔ prevents accidental contact with key components
- ↔ Compatible With Super Vac Accessories
 - ↔ Spiral Duct
 - ↔ Mountain Mister
 - ↔ Tilt Frame
 - ↔ Door Bar / Hanger
 - ↔ Foam Generator
- ↔ 5 Year Warranty

Specs

Motor ↔ Bluffton single speed, hazardous location rated Class 1 Group D

Motor Specs ↔ 1 Hp, 60hz, 115/230V

HxWxD ↔ 25.5" x 24.75" x 16.25" ↔ 648mm x 629mm x 413mm

Blade Diameter ↔ 20" ↔ 508mm

Weight ↔ 93 lbs ↔ 42 kg


RPM ↔ 1725

Start Requirements ↔ 4000w - 15 amp circuit

Run Requirements ↔ 1500w

Output (Shroud) ↔ 5840 cfm ↔ 9925 cmh

Output (Venturi) ↔ 9800 cfm ↔ 16,650 cmh

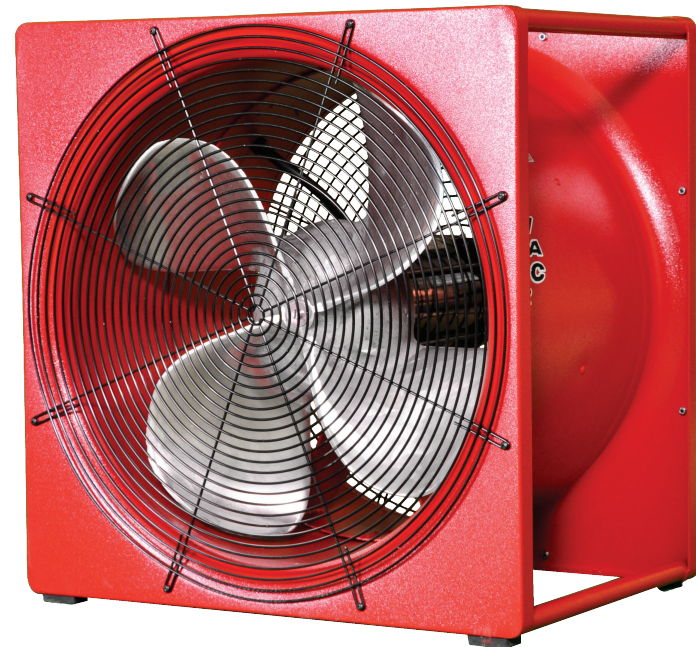



ELECTRIC SMOKE EJECTOR

A Super Vac, part number #P200SE, 20" electric smoke ejector shall be supplied. The unit shall feature a square construction design for strength and stability. The unit shall be designed with four (4) carrying handles on each corner for easy positioning and rapid deployment. All components of the smoke ejector shall 100% manufactured and assembled in the United States.

The smoke ejector shall be powered by a one (1) Horsepower Bluffton electric motor that is listed by Underwriters Laboratory for Hazardous Locations up to and including Class 1, Group D. The unit shall be operational with any 115 or 230 volt system.

The entire frame of the unit shall be constructed of steel and shall surround the four-blade 20" recurve tip blade to enhance lifting and user safety. The blade shall be constructed of precision cast aluminum alloy #319. The blade shall be precision balanced and attached to the engine shaft for a direct drive connection. Any smoke ejectors utilizing belts, pulley, gears, or additional shafts shall not be acceptable.

The unit shall be designed to attach a ventilation air duct to either the inlet or outlet side of the fan. The unit shall be designed to be used in conjunction with either a spiral or "L" air ducting and its Super Vac adapters.

The front and rear safety guards shall be designed to OSHA and U.L. Standards to prevent accidental contact with the blade. The unit shall be tested to AMCA 210 for air movement and the air movement shall exceed 5840 cubic feet per minute.

The smoke ejector shall be designed with the following:

| | |
|------------------------|---|
| Motor Manufacturer: | Bluffton Electric Motor |
| Horsepower: | 1HP |
| Voltage: | 115/230V |
| Cubic feet per minute: | 5840 CFM |
| Dimensions: | 25.25" high x 24.75" wide x 16.25" deep |
| Weight: | 93 pounds |

The smoke ejector shall have a minimum five (5) year warranty. The engine shall be warranted by the engine manufacturer for a minimum of two (2) years.